
Legend
- Line 181
- Line 182
- Line 183
- Line 184
- Line 185
- Line 186
- Line 187
- Line 188
- Line 189
- Line 190
- Line 191
- Line 192
- Line 193
- Line 194
- Line 195


101-E-102A/B/C/D
CRUDE/CRUDE COLUMN OVERHEAD EXCHANGER

(TYPE-C, NOTE-1)
S/S DT - 175° C
DP - 36.7 kg/cm²g
T/S DT - 161.5° C
DP - 28.2 kg/cm²g
DESIGN DUTY - 26.74 MMkcal/hr

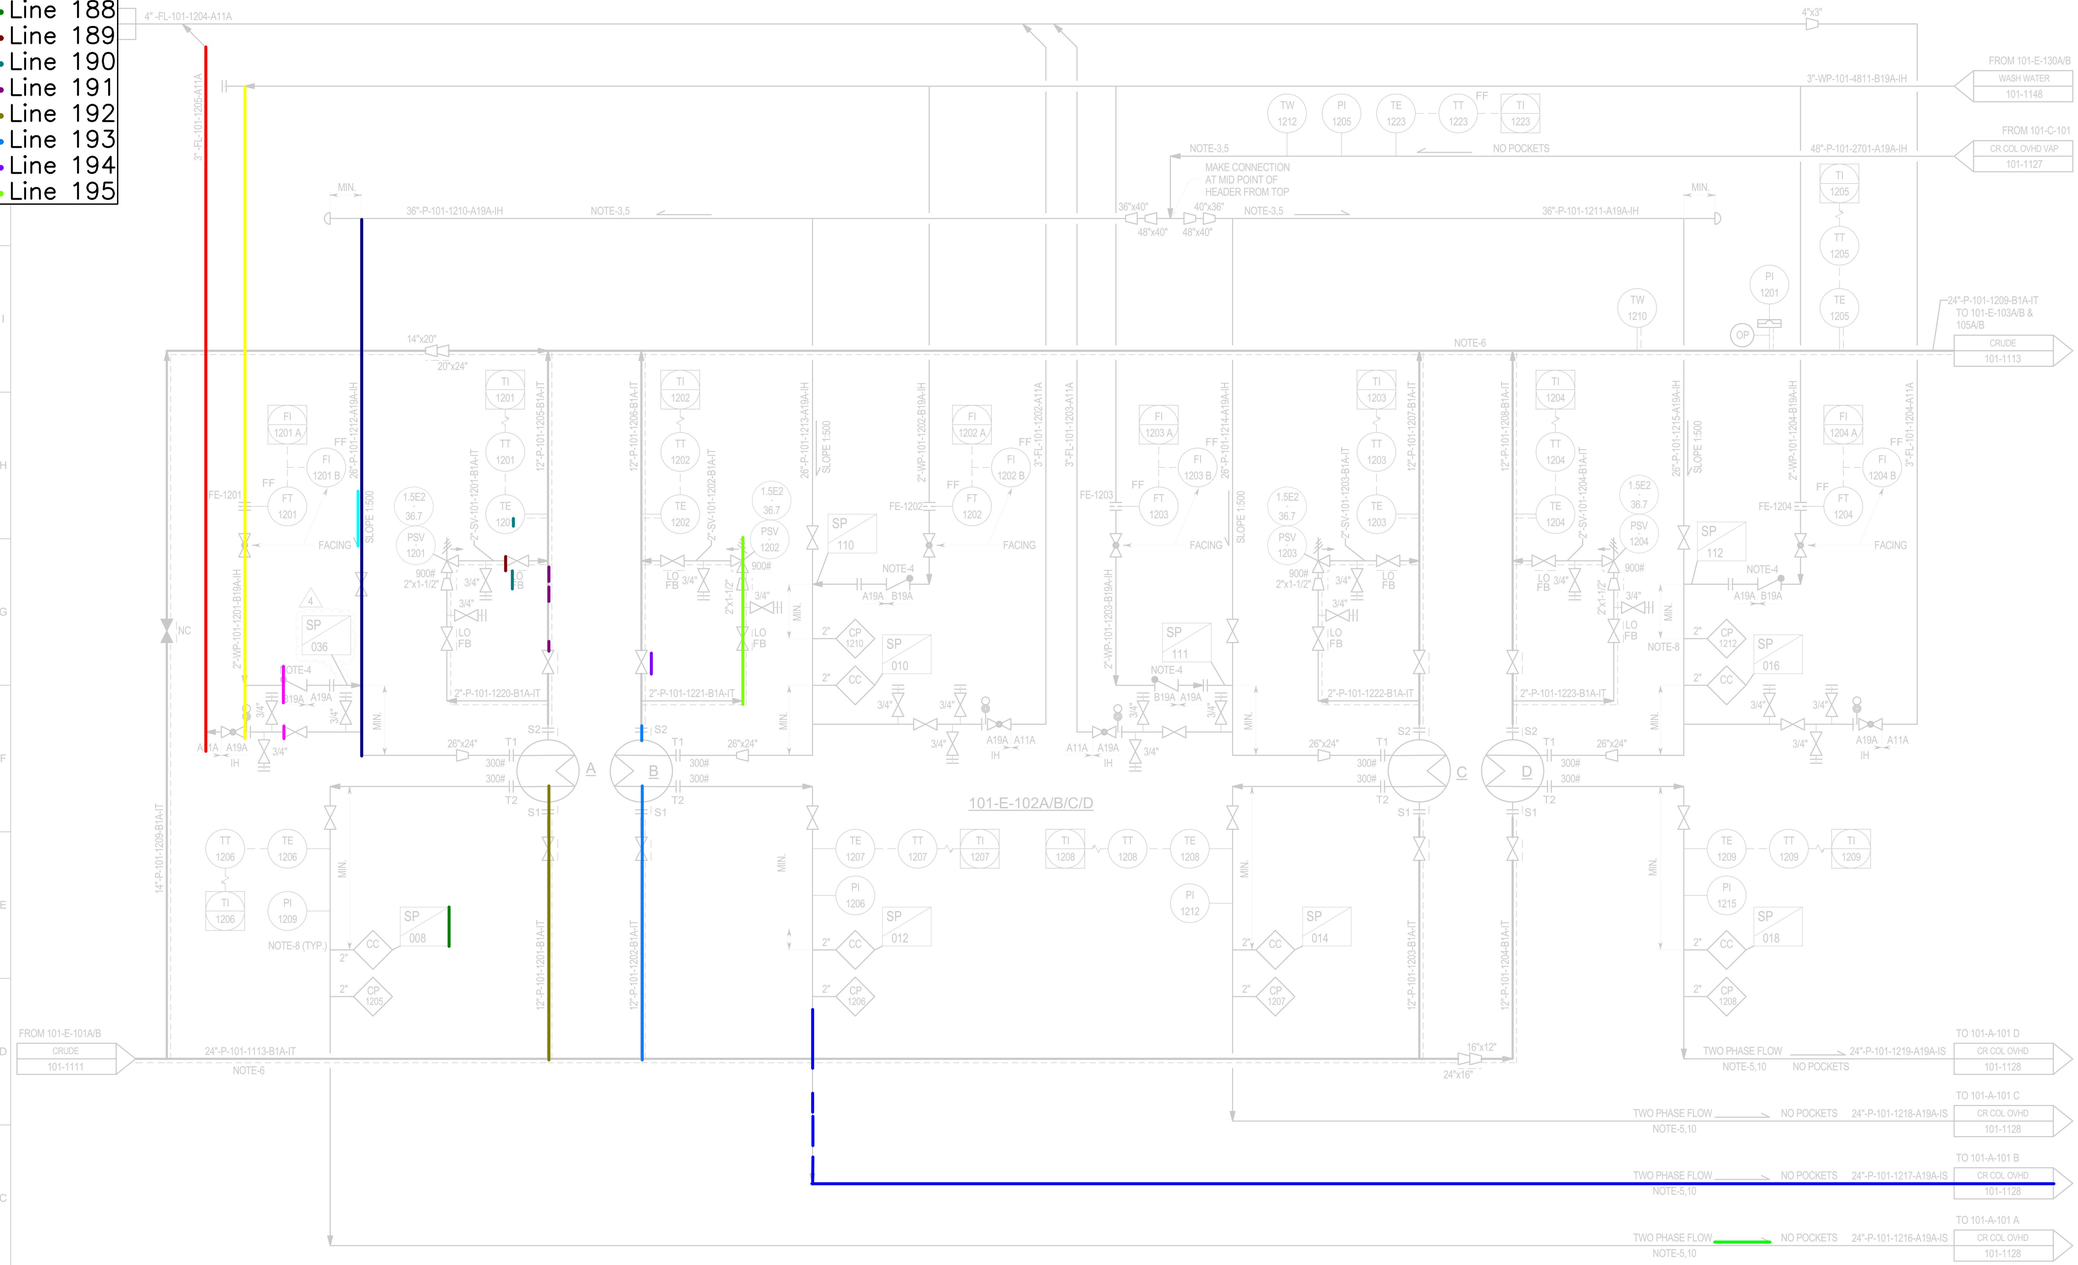

NOTES: -

1. FOR LEGEND SYMBOL AND GENERAL DETAILS, REFER P&ID NO. B068-79-41-00-1191/1192. (TPL DWG. NO. B224-CDU-TPL-000-1191/1192-SHT01/1192-SHT02).
   - FOR EXCHANGER DRAIN DETAILS REFER P&ID NO. B224-CDU-TPL-101-1246-SHT01 & B224-CDU-TPL-101-1246-SHT02.
   - FOR AIR COOLER DRAIN CONNECTION DETAILS REFER P&ID NO. B224-CDU-TPL-101-1247.
   - FOR PUMP DRAIN/VENT REFER P&ID NO.B224-CDU-TPL-101-1245-SHT01 & B224-CDU-TPL-101-1245-SHT02.
   - FOR FILTER DRAIN VENT DETAILS REFER P&ID NO. B224-CDU-TPL-101-1248.
   - FOR PUMP SEAL PLAN DETAIL REFER P&ID NO. B224-CDU-TPL-101-1184-SHT01, B224-CDU-TPL-101-1184-SHT02 & B224-CDU-TPL-101-1184-SHT03.
   - FOR CONTROL VALVE DRAIN VENT DETAILS REFER P&ID NO. B224-CDU-TPL-101-1243-SHT01 & B224-CDU-TPL-101-1243-SHT02.
   - FOR LEVEL INSTRUMENT DRAIN VENT DETAILS REFER P&ID NO. B224-CDU-TPL-101-1244-SHT01 & B224-CDU-TPL-101-1244-SHT02.
   - ALL INSTRUMENT TAG NUMBERS TO HAVE THE UNIT DESIGNATION PREFIX 101.
2. ALL DCS OPEN AND CLOSED LOOP INSTRUMENTS SHOWN IN P&ID WITH 'FF' ARE FOUNDATION FIELD BUS DEVICES. FOR INSTRUMENTS FOR WHICH FIELD BUS DEVICES ARE NOT SHOWN/AVAILABLE, SMART TRANSMITTERS/SMART POSITIONERS SHALL BE USED.
3. SYMMETRICAL PIPING.
4. WASH WATER TO BE INJECTED WITH REVERSE FLOW, CONE SPRAY INJECTION NOZZLE, AS PER DETAIL SHOWN BELOW.

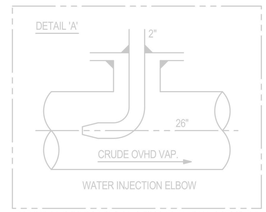

THE INJECTION NOZZLE TO BE INSERTED IN HORIZONTAL PORTION FOR PROPER MIXING

5. MAXIMUM ALLOWABLE PRESSURE DROP IN THE LINES IN THE CRUDE COLUMN OVHD CIRCUIT (I.E. FROM 101-C-101 TO 101-V-101 VIA 101-E-102A/B/C/D AND 101-A-101) IS 0.1 KG/CM2. ALL LINE SIZES IN THE CIRCUIT ARE CONFIRMED BASED ON FINAL ISOMETRICS.
6. CRUDE INLET AND OUTLET LINES TO BE ORIENTED SUCH THAT THE INLET AND OUTLET ARE DIAGONALLY OPPOSITE TO EACH OTHER AS SHOWN ON P&ID.
7. CORROSION MONITORING SYSTEM (CMS) SHALL BE DONE WITH CORROSION PROBE & CORROSION COUPON.
8. A MIN. OF 1 TO 1.5 M DISTANCE SHOULD BE KEPT BETWEEN CP AND CC. FOR MAINTENANCE PURPOSE.
9. CHEMICAL INJECTION SHALL BE DOSED THROUGH INJECTION TUBE WITH T-TYPE ACCESS FITTINGS.
10. LINE TO BE PROPERLY SUPPORTED.

No.	DATE	REVISIONS	DRN	BY	CKD	APPD
4	10.03.22	ISSUED FOR CONSTRUCTION		SC	MW	VD	PV
3	30.09.21	ISSUED FOR CONSTRUCTION		SC	MW	VD	PV
2	02.09.20	ISSUED FOR ENGG/ DESIGN WITH HAZOP RECOMMENDATION		RMB	KG	RS	SG
1	11.08.20	ISSUED FOR ENGINEERING/DESIGN		JO	KG	RS	SG
0	13.03.20	ISSUED FOR REVIEW		LC	KG	RS	SG

No.	DATE	REVISIONS	DRN	BY	CKD	APPD
1	14.12.18	REVISED AS MARKED	PP	UA/AT	GN	AM	
0	15.11.18	ISSUED FOR PACKAGE	S.K.L	UA/AT	GN	AM	

DETAILED ENGINEERING CONTRACTOR: FLUOR — FLUOR DANIEL INTERNATIONAL (MALAYSIA) SDN BHD

LSTK CONTRACTOR: TATA PROJECTS LIMITED, MUMBAI

PMC: इंजिनियर्स इंडिया लिमिटेड (भारत सरकार का उपक्रम) — ENGINEERS INDIA LIMITED (A Govt. of India Undertaking)

OWNER: एच पी सी एल राजस्थान रिफाइनरी लिमिटेड — HPCL RAJASTHAN REFINERY LTD — RAJASTHAN REFINERY PROJECT

पाइपिंग एण्ड इंस्ट्रूमेन्टेशन डायाग्राम
PIPING AND INSTRUMENTATION DIAGRAM
CRUDE/VACUUM DISTILLATION UNIT
CRUDE PREHEAT TRAIN-1B

अनुमाप SCALE	कार्य संख्या JOB NO.	विभाग DEPT.	अनुभाग SECTN.	इकाई UNIT	आरेख संख्या DWG. No.	संशो REV.
	B068	79	41	101	1112	1

TPL DRAWING NO. B224-CDU-TPL-101-1112 — टी पी एल आरेख संख्या — संशो REV. 4

DOCUMENT REVIEW DETAILS
Comments: Doc. B224-CDU-TPL-101-1112 Rev. 4
Signature with Date: 24-AUG-2022
Name Reviewer: UMER AFZAL (C888)
Page No.: 1 of 2

NOTICE: THIS DRAWING AND THE DESIGN IT COVERS ARE THE PROPERTY OF ENGINEERS INDIA LIMITED. THEY ARE MERELY LOANED AND ON THE BORROWER'S EXPRESS AGREEMENT THAT ALONG WITH ALL COPIES MADE, THEY WILL NOT BE DISCLOSED, COPIED, LOANED, EXHIBITED, NOR USED EXCEPT IN THE LIMITED WAY AND FOR THE PURPOSE AUTHORIZED BY ANY WRITTEN CONSENT GIVEN BY IT LENDER TO THE BORROWER.